

# M DRIVE 17™

MOTOR+DRIVER

## MOTION CONTROL



### FEATURES

- Integrated Microstepping Driver, Motion Controller and NEMA 17 High Torque 1.8° Stepping Motor
- +12 to +48 VDC Input Voltage
- Low Cost
- Extremely Compact
- Available Configurations:
  - Single Shaft
  - Linear Actuator\*
  - Internal Magnetic Encoder for Closed Loop Control
  - Integrated Planetary Gearbox
- Three Rotary Stack Sizes Available
- Single Supply
- Microstep Resolution up to 51,200 Steps Per Rev
- Open Loop or Optional Closed Loop Control
- Programmable Motor Run and Hold Currents
- Four +5 to +24 VDC I/O Lines
- One 10 Bit Analog Input
- 0 to 5MHz Step Clock Rate Selectable in 0.59Hz Increments
- RS-485 Communications with Selectable Baud Rate to 115K
- 62 Software Addresses for Multi-Drop Communications
- Simple 1 to 2 Character Instructions
- 12.0" (30.5cm) Flying Lead Interface

\* External Linear Actuator Only. Consult Factory for Availability.

### DESCRIPTION

The MDrive17 Motion Control offers the system designer a low cost, intelligent motion controller integrated with a NEMA 17 high torque stepping motor and a +12 to +48 volt microstepping driver.

The MDrive17 Motion Control adds a versatile array of functions by combining a complete, programmable motion controller with our already compact and cost effective standard MDrive17, adding little cost and no increase in size. Standard offerings include four +5 to +24 volt general purpose I/O lines, one 10 bit analog input, 0 to 5MHz step clock rate, microstep resolution up to 51,200 steps per revolution, and a full featured easy-to-program instruction set.

The MDrive17 Motion Control communicates over RS-485 which allows for point-to-point or multiple unit configurations utilizing one communication port. Addressing and hardware support up to 62 uniquely addressed units communicating over a single line. Baud rate is selectable from 4,800 to 115K.

The MDrive17 Motion Control is available with optional closed loop control. The closed loop configuration adds a 512 line (2048 edge) magnetic encoder with index mark, internal to the MDrive so there is no increase in length. Functionality increases with the addition of stall detection, position maintenance, and find index mark.

In addition to an encoder option, available motor configurations include a single shaft rotary motor and an external linear actuator with long life Acme screw\*. Rotary versions are available in single, double and triple stack sizes: 13, 15 & 19. Interface connections are accomplished using 12.0" (30.5cm) flying leads.

The MDrive17 Motion Control is a compact, powerful and inexpensive solution that will reduce system cost, design and assembly time for a large range of stepping motor applications.



## MDRIVE17 MOTOR SPECIFICATIONS

### MD1713 Single Stack

Holding Torque .....32 oz-in / 22.6 N-cm  
 Detent Torque .....1.66 oz-in / 1.17 N-cm  
 Rotor Inertia .... 0.00053 oz-in-sec<sup>2</sup> / 0.038 kg-cm<sup>2</sup>  
 Weight (Motor+Driver)..... 9.8 oz / 277.8 g

### MD1715 Double Stack

Holding Torque .....60.0 oz-in / 42.4 N-cm  
 Detent Torque .....2.08 oz-in / 1.47 N-cm  
 Rotor Inertia .... 0.00080 oz-in-sec<sup>2</sup> / 0.057 kg-cm<sup>2</sup>  
 Weight (Motor+Driver)..... 10.5 oz / 297.7 g


### MD1719 Triple Stack

Holding Torque .....74.9 oz-in / 52.9 N-cm  
 Detent Torque .....3.47 oz-in / 2.45 N-cm  
 Rotor Inertia .... 0.00116 oz-in-sec<sup>2</sup> / 0.082 kg-cm<sup>2</sup>  
 Weight (Motor+Driver)..... 15.1 oz / 428.1 g


## TORQUE-SPEED CURVES

### Rotary Motor


#### MD1713 Single Stack

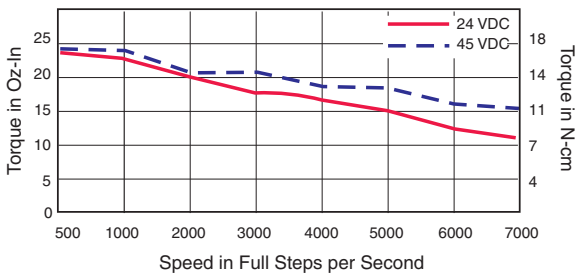

#### MD1715 Double Stack

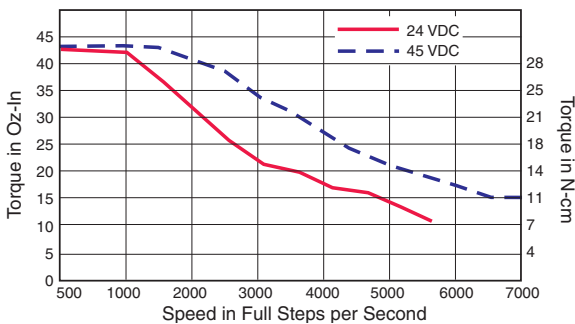



#### MD1719 Triple Stack

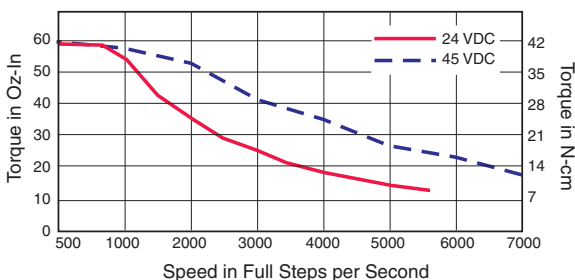

## MDRIVE17 MOTION CONTROL – MECHANICAL SPECIFICATIONS

Dimensions in Inches (mm)

### Rotary MDrive17: Single Shaft & Encoder Versions

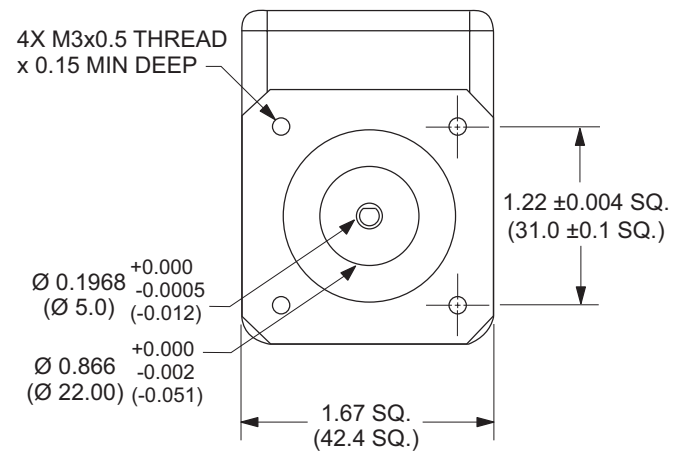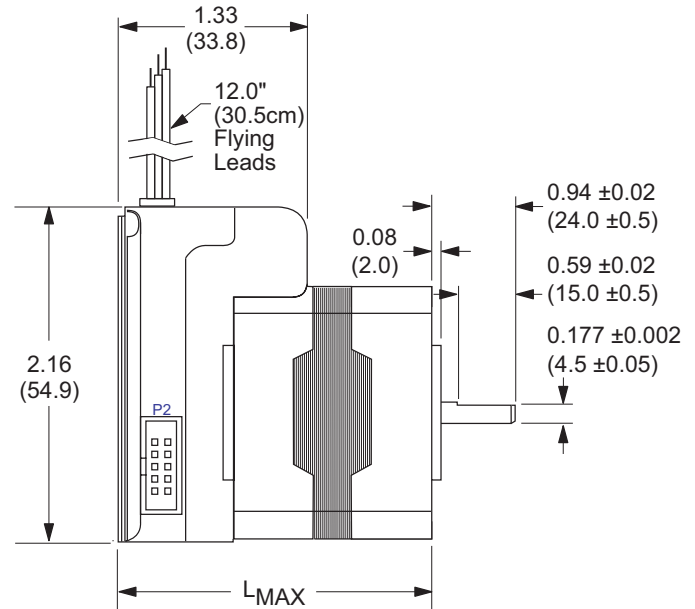

#### L<sub>MAX</sub> MDrive Lengths Inches (mm)

Stack Size	SINGLE SHAFT or ENCODER VERSION
1713	2.20 (55.9)
1715	2.43 (61.7)
1719	2.75 (69.8)

## MDRIVE17 WITH PLANETARY GEARBOX

The MDrive17 is available with a Planetary Gearbox option developed to increase torque at lower speeds, enable better inertia matching and produce finer positional resolutions. These efficient, low maintenance Planetary Gearbox come fully assembled with the MDrive and are offered in a large number of

reduction ratios in 1-, 2- and 3-stage configurations. An optional NEMA Flange allows mounting the Planetary Gearbox to the load using a standard NEMA bolt circle. Planetary Gearbox may be combined with other MDrive17 options, however are unavailable on Linear Actuator versions.

Parameters	1-Stage	2-Stage	3-Stage
Permitted Output Torque (oz-in/Nm)	425/3.0	1062/7.5	2124/15.0
Gearbox Efficiency	0.80	0.75	0.70
Maximum Backlash (degree)	0.80°	0.85°	0.90°


### Output Side with Ball Bearing

Maximum Load, Radial (lb-force/N)	36/160	52/230	67.5/300
Maximum Load, Axial (lb-force/N)	11/50	18/80	25/110
Weight - Gearbox Only (oz/g)	14.3/406	17.9/508	21.5/609
Weight - Gearbox & NEMA Flange (oz/g)	14.8/420	18.5/525	22.2/630

## PLANETARY GEARBOX MECHANICAL SPECIFICATIONS

Dimensions in Inches (mm)

### Planetary Gearbox for MDrive17

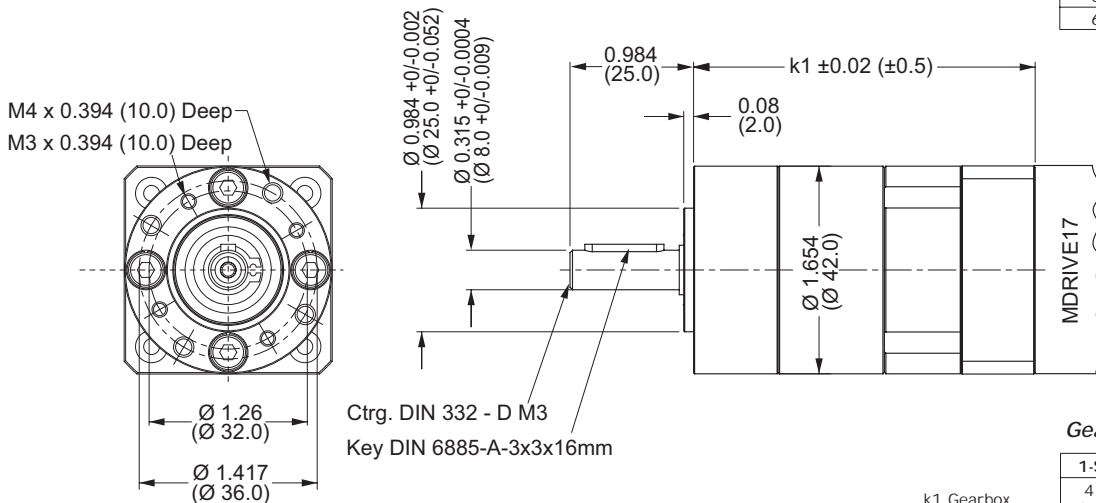


### Gearbox Ratios (Rounded)

1-Stage	2-Stage	3-Stage
3.70:1	13.73:1	50.89:1
5.18:1	15.88:1	58.85:1
6.75:1	18.36:1	68.06:1
	19.20:1	71.16:1
	22.20:1	78.71:1
	25.01:1	92.70:1
	26.85:1	95.17:1
	28.93:1	99.50:1
	34.97:1	107.20:1
	45.56:1	115.07:1
		123.97:1
		129.62:1
		139.13:1
		149.90:1
		168.84:1
		181.24:1
		195.26:1
		236.09:1
		307.54:1

### Gearbox Lengths Inches (mm)

	1-Stage	2-Stage	3-Stage
k1 Gearbox	4.315 (109.6)	5.169 (131.3)	6.024 (153.0)
k2 Gearbox w/ NEMA Flange	4.433 (112.6)	5.287 (134.3)	6.142 (156.0)

### Planetary Gearbox with Optional NEMA Output Flange

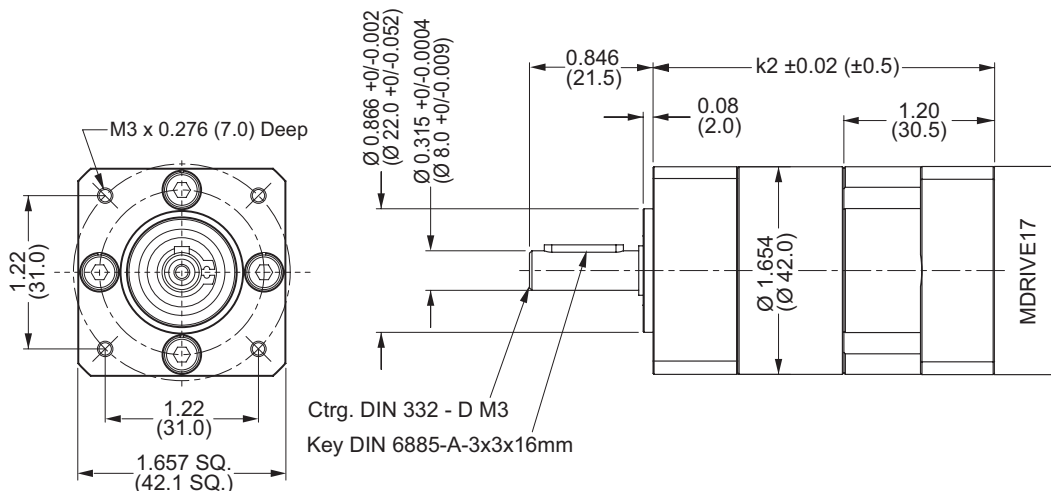

## MDRIVE17 MOTION CONTROL - OPTIONS

### Planetary Gearbox

Efficient, low maintenance Planetary Gearbox are offered assembled with the MDrive17. Details inside.

### Encoder

The MDrive17 Motion Control is available with an internal 512-line magnetic encoder with index mark.



### Linear Actuator - External

An External Linear Actuator with long life Acme Screw is a custom option. Consult factory for availability.

### Communications Converter Cable

This convenient 6' (1.8m) accessory cable connects a PC's standard DB-9 Serial Comm Port to the MDrive's P2 Connector. An in-line RS-232 to RS-485 converter enables parameter setting to a single MDrive Motion Control. Purchase of this cable is recommended with first orders. Part No. MD-CC200-000.

## ORDER INFORMATION

MDRIVE17 MOTION CONTROL		OPTIONS	
<p>Stack Sizes 13 = Single Stack 15 = Double Stack 19 = Triple Stack</p> <p><b>MDIF 17</b>  <b>OPTION</b></p> <p><b>Example #1:</b> Part Number <b>MDIF1719</b> is an MDrive17 Motion Control with Flying Leads, NEMA 17 motor, stack size <b>19</b>.</p>		<p><b>Planetary Gearbox</b> <b>G</b> </p> <p>Gearbox Ratio Rounded to Nearest Whole Number</p>	<p><b>Example #3: MDIF1719G5</b> Rounding ratio to the nearest whole number, the above adds a Planetary Gearbox with 5.18:1 ratio to the part shown in example #1. Add -F if optional NEMA Flange is desired.</p>
		<p><b>Internal Encoder</b> <b>E</b></p>	<p><b>Example #3: MDIF1719E</b> Adds a 512 line internal magnetic Encoder to the part shown in example #1.</p>
		<p><b>Linear Actuator (External)</b> <b>L</b></p>	<p><b>Consult Factory for Availability</b></p>



P.O. Box 457, 370 N. Main Street  
Marlborough, CT 06447 U.S.A.

Phone: 860/295-6102  
Fax: 860/295-6107  
E-mail: info@imshome.com  
Home Page: www.imshome.com

*Distributed By:*

### TECHNICAL SUPPORT

*Eastern U.S.*  
Phone: 860/295-6102  
Fax: 860/295-6107  
E-mail: etech@imshome.com

*Western U.S.*  
Phone: 760/966-3162  
Fax: 760/966-3165  
E-mail: wtech@imshome.com

### IMS MOTORS DIVISION

105 Copperwood Way, Suite H  
Oceanside, CA 92054  
Phone: 760/966-3162  
Fax: 760/966-3165  
E-mail: motors@imshome.com

### IMS EUROPE GmbH

Hahnstrasse 10, VS-Schwenningen  
Germany D-78054  
Phone: +49/7720/94138-0  
Fax: +49/7720/94138-2  
E-mail: info@imseuropehome.com

### European Sales Management

4 Quai Des Etroits  
69005 Lyon, France  
Phone: +33/4 7256 5113  
Fax: +33/4 7838 1537  
E-mail: bmartinez@imshome.com

### German Sales/Technical Support

Phone: +49/35205/4587-8  
Fax: +49/35205/4587-9  
E-mail: hrhland@imshome.com

Product information covered by IMS Product Disclaimer available at www.imshome.com.  
Visit the IMS web site for the most up-to-date product information.

© 2002, 2004 Intelligent Motion Systems, Inc. All Rights Reserved.

REV122004